





①



②



③

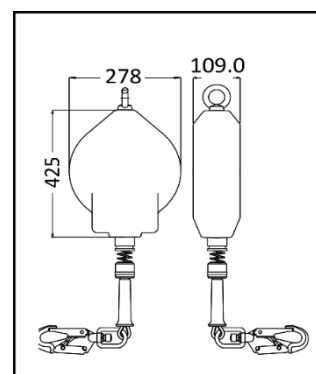S
Y
N
T
H
E
T
I
C

HS CODE
84798997
CARTON SIZE / PCS.
80 x 40 x 24 cm / 2
AET N°PPE-3460-24135-Cert
ANCCP Certification Agency S.r.l. N°0302 Via dello Struggino, 6 57121 LIVORNO (LI) - Italy
MODULE D FI14/14003.12
SGS Fimko Oy, N°0598 Takomotie 8, 380 HELSINKI, Finland

REF.	FA 20 400 20R
 LG. KG	18.0 m
	140 KG
 MAT.	Polyamide 6 - 30% fiber glass
	Synthetic Ø6.0 mm
	 FA 50 223 25B / FA 50 203 20
	x2
R(kN)	15 kN
	NO
	8.10 KG




Longueur Poids maxi utilisateur
Length Max. user weight
Longitud Peso máximo del usuario
Lunghezza Peso Max. dell'utente
Länge Höchstgewicht des Benutzers




Nombre d'émerillons
 Number of swivels
Cantidad de eslabones giratorios
 Numero di tornichetti
Anzahl der Wirbel

MAT.



Matière carter / câble
 Material of casing / wire rope
Material cárter / cable
 Material dei carter / cavo
Material Gehäuse / Seil



Matière connecteur haut / connecteur bas
 Material of top connector / bottom connector
Material conector alto / conector bajo
 Materiale connettore alto / connettore basso
Material oberes / unteres Verbindungselement



Homologué pour le travail à proximité d'arêtes vives
 Approved for work near sharp edges
Homologado para trabajo cerca de aristas vivas
 Omologato per lavoro in prossimità di spigoli vivi
Zugelassen für Arbeiten in der Nähe scharfer Kanten